



Registered ISO 9001:2000

T E C H N I C A L D A T A


CV-400P-90-MP26 (Part # 3007sl)

CLEAR FLEXIBLE VINYL-PERMANENT ADHESIVE

DESCRIPTION

CV-400P-90-MP26 is a 4-mil polished, clear flexible monomeric vinyl designed for general purpose permanent label applications. The vinyl is coated with our MP26 permanent acrylic adhesive and is supplied on a 90lb. bleached, poly-coated kraft release liner. The MP26 exhibits good adhesion to high surface energy substrates and is resistant to heat, humidity and UV light. The product is designed for 6-month outdoor applications and is not recommended for use on low surface energy substrates.

TAPE CONSTRUCTION

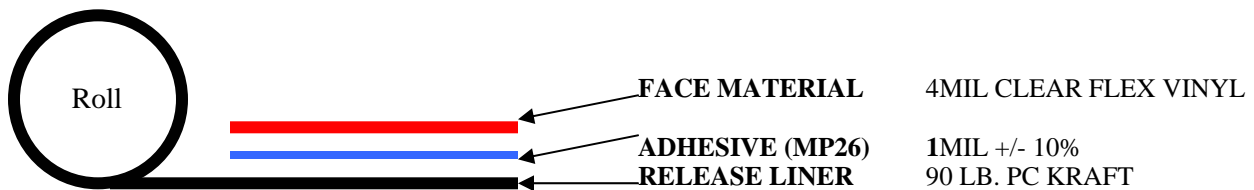

TYPICAL ADHESIVE PERFORMANCE DATA

PEEL ADHESION (PSTC-101)

15 MINUTE APPLIED (oz./in.)	35-45
24 HOUR APPLIED (oz./in.)	65-75

SHEAR ADHESION (PSTC-107)

1" X 1", 1,000 GRAMS, 72 DEGREES F (Hours)	24+
--	-----

MINIMUM APPLICATION TEMPERATURE	50 DEGREES F
--	---------------------

NOTE: Performance data indicates average production values from stainless steel and should not be used for minimum specification values. It is required that the converter determines suitability of tape prior to use.

DATE: 10/11/05 igc

The information contained herein is to the best of our knowledge and belief, accurate. However, since the conditions of handling and of use are beyond our control, we make no guarantee of results and assume no liability for damages incurred by following these suggestions. Nothing contained herein is to be construed as a recommendation for use in violation of any patents or of applicable laws or regulations.

CV-400P-90-MP26 GRAPHIC