



Registered ISO 9001:2000

T E C H N I C A L D A T A


CV-400R-90-RP10 (Part # 3008sl)

CLEAR FLEXIBLE VINYL-REMOVABLE ADHESIVE

DESCRIPTION

CV-400R-90-RP10 is a 4-mil polished, clear flexible monomeric vinyl designed for general purpose removable label applications. The RP10 adhesive is a cross-linked acrylic solution copolymer which exhibits excellent controlled ability to remove from a broad range of non-cellulose based substrates. The adhesive is resistant to mild plasticizers, heat, humidity, UV light, water submersion and mild solvents. The product is designed for 6-month outdoor applications.

TAPE CONSTRUCTION

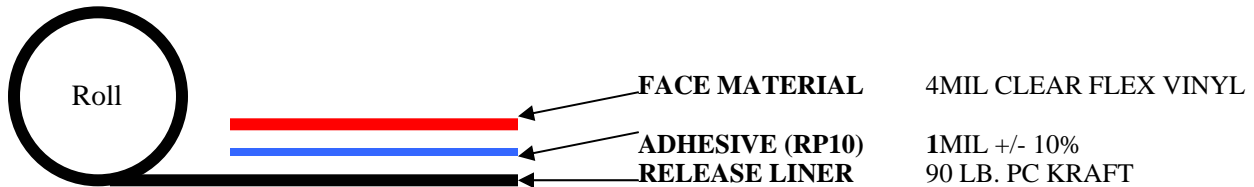

TYPICAL ADHESIVE PERFORMANCE DATA

PEEL ADHESION (PSTC-101)

15 MINUTE APPLIED (oz./in.) 30-40
24 HOUR APPLIED (oz./in.) 30-40

SHEAR ADHESION (PSTC-107)

1" X 1", 1,000 GRAMS, 72 DEGREES F (Hours) 4+

MINIMUM APPLICATION TEMPERATURE 50 DEGREES F

NOTE: Performance data indicates average production values from stainless steel and should not be used for minimum specification values. It is required that the converter determines suitability of tape prior to use.

DATE: 10/11/05 igc

The information contained herein is to the best of our knowledge and belief, accurate. However, since the conditions of handling and of use are beyond our control, we make no guarantee of results and assume no liability for damages incurred by following these suggestions. Nothing contained herein is to be construed as a recommendation for use in violation of any patents or of applicable laws or regulations.

CV-400R-90-RP10 GRAPHIC