



Registered ISO 9001:2000

T E C H N I C A L D A T A


**FV-340WR-90-RP10 (Part # 3036sl)**

**WHITE FLEXIBLE VINYL-REMOVABLE ADHESIVE**

**DESCRIPTION**

FV-340WR-90-RP10 is 3.4 mil white flexible vinyl coated with our RP10 acrylic removable adhesive designed for high performance label applications. The RP10 is a cross-linked acrylic solution copolymer which exhibits excellent controlled ability to remove from a broad range of non-cellulose based substrates. The adhesive is resistant to mild plasticizers, heat, humidity, UV light, water submersion and mild solvents. As with all high performance applications, thorough evaluation is required prior to use.

**TAPE CONSTRUCTION**

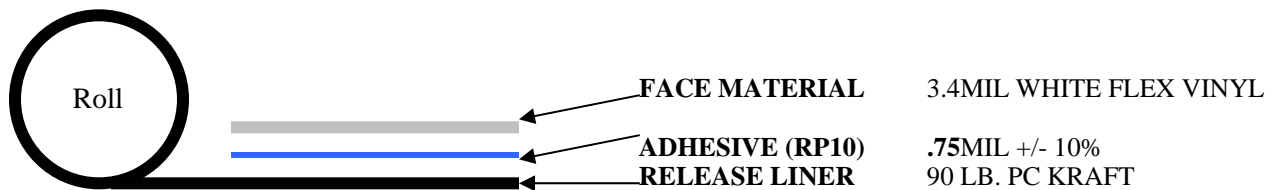

**TYPICAL ADHESIVE PERFORMANCE DATA**

**PEEL ADHESION (PSTC-101)**

15 MINUTE APPLIED (oz./in.)	30-40
24 HOUR APPLIED (oz./in.)	40-50

**SHEAR ADHESION (PSTC-107)**

1" X 1", 1,000 GRAMS, 72 DEGREES F (Hours)	24+
--	-----

<b>MINIMUM APPLICATION TEMPERATURE</b>	<b>50 DEGREES F</b>
--	---------------------

**NOTE:** Performance data indicates average production values from stainless steel and should not be used for minimum specification values. It is required that the converter determines suitability of tape prior to use.

**DATE:** 10/11/05 igc

The information contained herein is to the best of our knowledge and belief, accurate. However, since the conditions of handling and of use are beyond our control, we make no guarantee of results and assume no liability for damages incurred by following these suggestions. Nothing contained herein is to be construed as a recommendation for use in violation of any patents or of applicable laws or regulations.

FV-340WR-90-RP10 GRAPHIC