



Registered ISO 9001:2000

T E C H N I C A L D A T A


SRV-600-90-EP30 (Part # 3061sl)

WHITE SEMI-RIGID VINYL-PERMANENT ADHESIVE

DESCRIPTION

SRV-600-90-EP30 is a 6mil semi-rigid white vinyl coated with a heavy mass of our EP30 modified acrylic emulsion adhesive. The EP30 exhibits very good tack and peel adhesion and moderate shear strength. The EP30 has good resistance to heat, humidity, UV light, mild solvents and plasticizers. EP30 is recommended for use on difficult applications to low energy surfaces plastics, including OEM battery labels. The release liner is an easy release 90lb. Poly-coated layflat bleached kraft.

TAPE CONSTRUCTION

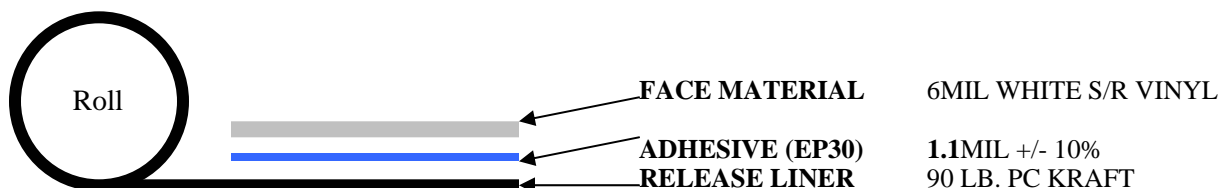

TYPICAL ADHESIVE PERFORMANCE DATA

PEEL ADHESION (PSTC-101)

15 MINUTE APPLIED (oz./in.)	75-85
24 HOUR APPLIED (oz./in.)	125-135

SHEAR ADHESION (PSTC-107)

1" X 1", 1,000 GRAMS, 72 DEGREES F (Hours) 5+

MINIMUM APPLICATION TEMPERATURE 50 DEGREES F

NOTE: Performance data indicates average production values from stainless steel and should not be used for minimum specification values. It is required that the converter determines suitability of tape prior to use.

DATE: 10/11/05 igc

The information contained herein is to the best of our knowledge and belief, accurate. However, since the conditions of handling and of use are beyond our control, we make no guarantee of results and assume no liability for damages incurred by following these suggestions. Nothing contained herein is to be construed as a recommendation for use in violation of any patents or of applicable laws or regulations.

SRV-600-90-EP30 GRAPHIC