



Registered ISO 9001:2008

T E C H N I C A L D A T A


A915-2PT (Part # 2407sl)
ANTI-SQUEAK BLACK FLOCKED FABRIC PSA

A915-2PT
INDUSTRIAL

DESCRIPTION

A915-2PT is a 1.5mm high quality black flocked fabric designed for demanding automotive interior anti-squeak applications. A915-2PT is coated with a heavy mass of high performance acrylic adhesive, which exhibits excellent adhesion to a wide variety of substrates and has resistance to heat, humidity, solvents and mild plasticizers. This product is also available on a 78# Densified Kraft liner. The flocked fabric was specifically designed to meet the performance requirements for Ford ESB-M6G17-A and GM 6420M.

TAPE CONSTRUCTION

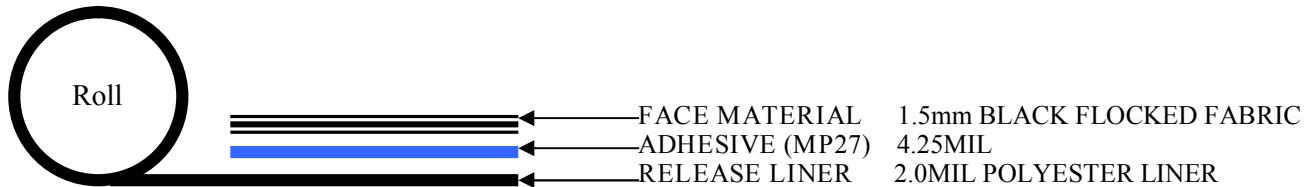

TYPICAL ADHESIVE PERFORMANCE DATA

PEEL ADHESION (PSTC-101)

Substrate: PP	15 MIN APPLIED (oz./in.)	35-55
	24 HR APPLIED (oz./in.)	45-60
Substrate: SS	15 MIN APPLIED (oz./in.)	45-55
	24 HR APPLIED (oz./in.)	50-70

SHEAR ADHESION (PSTC-107)

1" X 1", 1,000 GRAMS, 72 DEGREES F (Hours) 24+

THICKNESS TOLERANCE

Flock material	59.05Mil
Adhesive	4.25Mil
Total	63.3Mil Nominal (+/-10%)

MINIMUM APPLICATION TEMPERATURE 50 DEGREES F

NOTE: Performance data indicates average production values from stainless steel and should not be used for minimum specification values. It is required that the converter determines suitability of tape prior to use.

DATE: 11/30/10 igc

The information contained herein is to the best of our knowledge and belief, accurate. However, since the conditions of handling and of use are beyond our control, we make no guarantee of results and assume no liability for damages incurred by following these suggestions. Nothing contained herein is to be construed as a recommendation for use in violation of any patents or of applicable laws or regulations.