



Registered ISO 9001:2008


T E C H N I C A L D A T A

PF-200A-78MO-MP30 (Part # 2118sl)
SINGLE COATED CLEAR POLYESTER FILM PSA

DESCRIPTION

PF200A-78MO-MP30 is a 2.0mil polyester film designed for laminating to polyester urethane foams and sponge rubbers to improve the surface characteristics. PF200A-78MO-MP30 is coated with an aggressive acrylic adhesive that exhibits excellent adhesion to a wide variety of substrates and exhibits good resistance to heat, humidity and mild plasticizers.

TAPE CONSTRUCTION

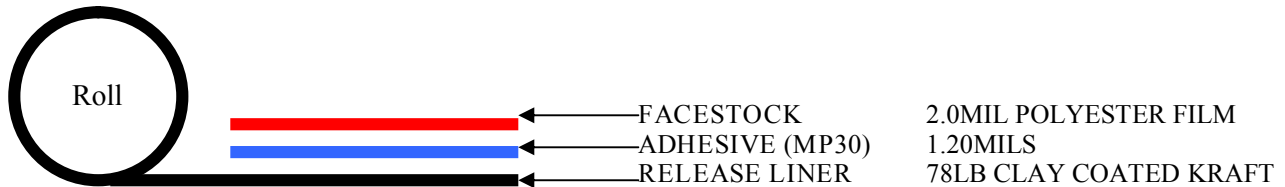

TYPICAL ADHESIVE PERFORMANCE DATA

PEEL ADHESION (PSTC-101)

Table with 3 columns: Substrate, Application Time, and Adhesion Value. Rows include PP and SS substrates with 15 MIN and 24 HR application times.

SHEAR ADHESION (PSTC-107)

1" X 1", 1,000 GRAMS, 72 DEGREES F (Hours) 10+

MINIMUM APPLICATION TEMPERATURE 50 DEGREES F

NO LOAD APPLIED, SERVICE TEMP. RANGE -35 TO 175 DEGREES F CONTINUOUS -35 TO 250 DEGREES F SHORT TERM

NOTE: Performance data indicates average production values from stainless steel and should not be used for minimum specification values. It is required that the converter determines suitability of tape prior to use.

DATE: 12/20/10 igc

The information contained herein is to the best of our knowledge and belief, accurate. However, since the conditions of handling and of use are beyond our control, we make no guarantee of results and assume no liability for damages incurred by following these suggestions. Nothing contained herein is to be construed as a recommendation for use in violation of any patents or of applicable laws or regulations.

PF200A-78MO-MP30